

IT IS STRICTLY PROHIBITED TO DISTRIBUTE THE full DOCUMENT TO ANY
OTHER ORGANIZATION THAN TO THE FINAL CUSTOMER .
ANY VIOLATIONS OR BREACH OF COPYRIGHT WILL BE PROSECUTED
TO THE FULL EXTEND OF THE LAW.

Please contact iMAR sales engineers to receive
the the full and latest version of this manual! [2022]
sales@imar-navigation.de
+49 6894 9657 36

iIPSC-TR **Cluster of Several Two Axes Tracking Sensor Platforms** **of Type iIPSC-GP40**

19.07.2011, rev. 4.18
DOC-No. DOC110507001

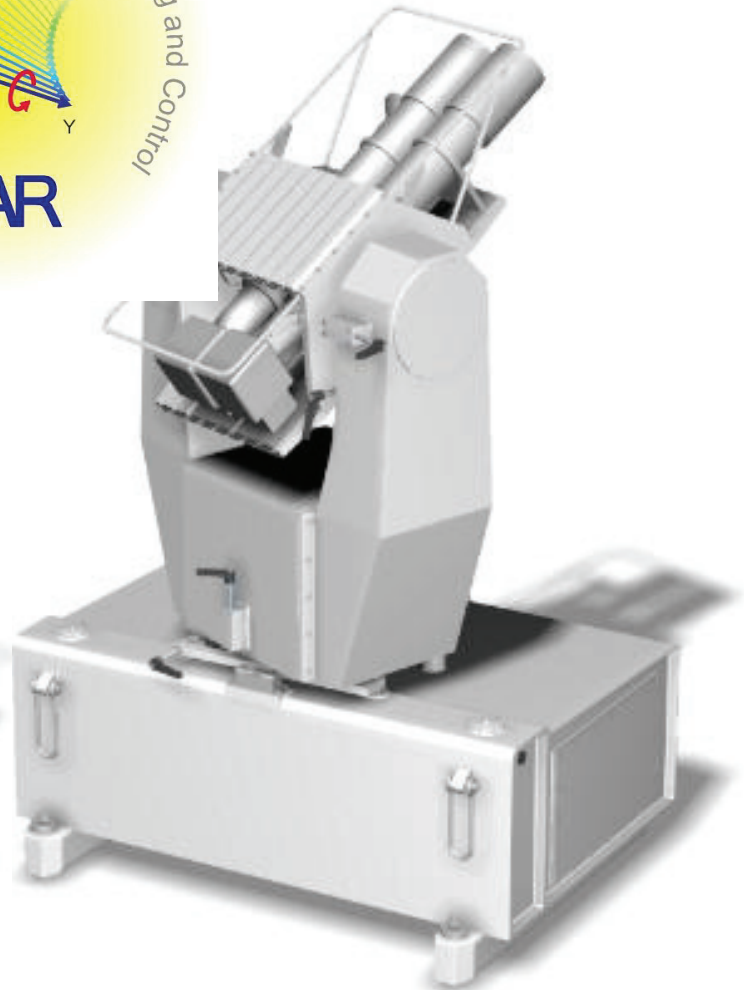
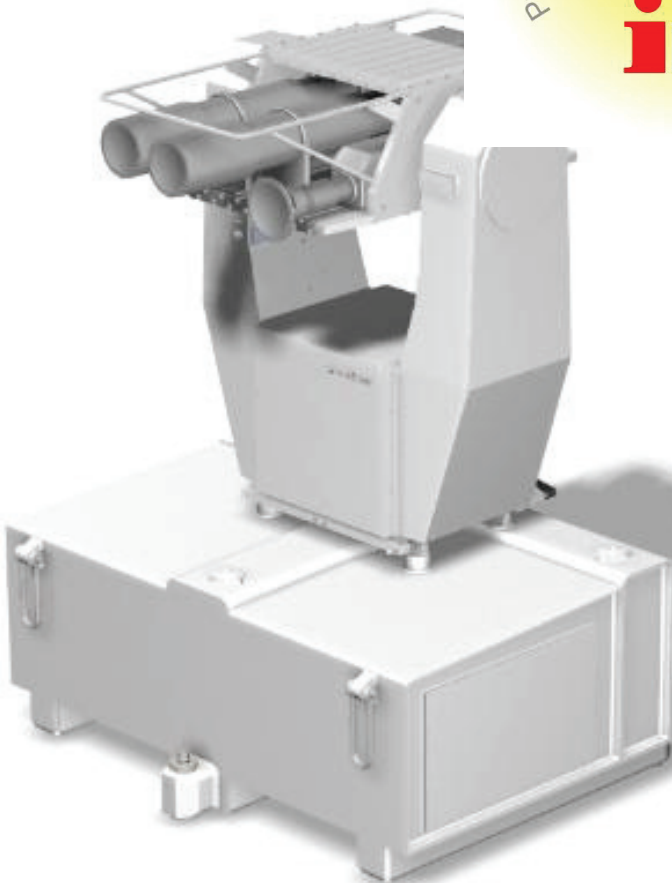
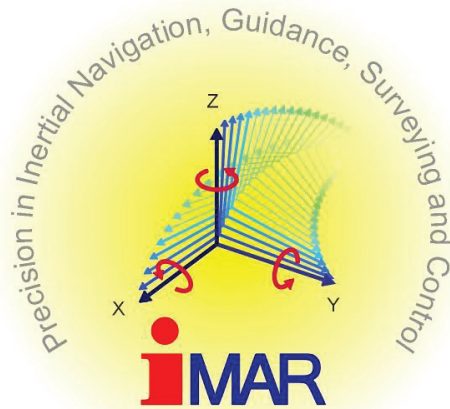


Table of Content

1	Introduction	7
1.1	General Overview	7
1.2	Features Overview	9
1.3	Topology Overview	11
1.4	Data Storage Overview	13
2	Two-Axis Stabilized Multiple Sensor Platform iPSC-GP40	14
2.1	Platform Design	14
2.2	Servo Loop for Drive Control	14
Current	15
2.3	Sensor Mounting Surfaces	16
2.4	Payload	16
2.5	Elevation and Azimuth Axis Clamp/ Stow Lock	17
2.6	End-Stops for Elevation Axis	18
2.7	Electrical Payload Access/Azimuth Slip Rings	20
2.8	Line of Sight Accuracy	21
2.9	Azimuth Axis inclination Monitoring	21
2.10	Lifting Provisions and Coarse Level	22
2.11	Mounting and Leveling Feet	23
2.12	Standard Canvas Cover / Protection Radome	23
2.13	Environmental Conditioning	23
3	Sensors and Support Equipment	24
3.1	Image Tracker iOET ²	24
3.2	Joystick and Touchscreen	26
3.2.1	Joystick Operational Overview	26
3.2.2	Touch Screen and Station Rack PC	28
3.3	Daylight and IR Cameras	28
3.3.1	Range Performance Simulation	28
3.3.2	Long Range MWIR	28
3.3.3	Vis Camera with Optics	30
3.3.4	Aiming Vis Camera with Optics	33
3.4	Inertial Navigation System iNAV-RQH-1003	34
3.5	iREF-L1L2 GPS Reference Station and GPS inside of each Tracker	35
3.6	Time Synchronization of the Cameras and Video Data Storage	35
3.7	Design of SSLC / CU	35
3.8	Design of TRCC / CCU	39
3.8.1	Central Control Unit (CCU)	39
3.9	Air Conditioners	41
3.10	Generator Sets	42
3.10.1	UPS and Battery Pack	42
3.11	Wireless Communication Network	43
4	Specification of Mechanics, Drive System and Payload Interface	47
4.1	Mechanics and Electrical	47
4.2	Environmental Conditions	49
4.3	Other Components Specifications	49

4.4	Coordinate Systems	50
5	Maintenance Hints	52
5.1	Surveying of Azimuth and Elevation Axes	53
5.2	Build-In Tests (BIT) on Hardware and Software Level	57
6	Data Analysis and Specific Information	59
6.1	Real-time and Post-Processing	59
6.2	Specific Target Observation Information	60
7	Graphical User Interface / High Level Software	62
7.1	Screenshots	62
7.1.1	Configuration Mode	64
7.1.2	Test Mode / Sub System Power ON/OFF	76
7.1.3	Pre-Mission Mode	80
7.1.4	In-Mission Mode	90
7.1.5	Post-Mission Mode	95
8	Index	98
Appendix:	Outline Illustrations of Platform	99

Table of Figures

Figure 1: Tracker Range iIPSC-TR with included target trackers iIPSC-GP40.....	7
Figure 2: 3D View of the Instrument iIPSC-GP40 (version with rectangular foot).....	8
Figure 3: System architecture of N trackers, connected to one Central Station (TRCC / CCU).....	11
Figure 4: System architecture of N trackers (SSLC / CU),	12
Figure 5: Torque Drive Control Design (iMAR controller).....	15
Figure 6: Sensor Mounting Surface	16
Figure 7: Axes Stow Locks	17
Figure 8: Securing the brake handle of elevation axis before powering the drives	18
Figure 9: Robust end-stops to protect mounted payload.....	19
Figure 10: Lifting provisions and clamping (rectangular base version).....	22
Figure 11: Video Tracker Interface Software	24
Figure 12: Mobile Operator Console Design (example only, depends on options).....	36
Figure 13: Mobile Operator Console Design (example only, depends on options).....	37
Figure 14: Replacement of inclinometer by surveying adapter and mounted prism on-top	54
Figure 15: Tracker with mounted mirror and auto-collimator (for wobbling surveying)	55
Figure 16: Zoomed picture of mirror adjustment	56

Document History

Rev.	Date	Changes
1.0	05.04.2006	Initial document, helicopter testing implementation
..
4.0	08.04.10	Update taking comments from customer into account (25./28.03.2010)
4.1	19.04.10	Update taking comments from customer into account (14.04.2010)
4.2	30.04.10	Communication Protocol expanded according to Custome Requests
4.3	02.05.10	Joystick panel picture added
4.4	16.05.10	Operational Mode explained more in detail. No console but cases. (RS232-to-Ethernet) added on customer request; Block diagram extended
4.5	26.06.10	Protocol D adapted
4.6	05.08.10	Inclinometer operation and joystick panel layout detailed, software description added
4.7	27.08.10	SKIP command adapted to TVT capabilities
4.8	18.09.10	Software description updated
4.9	20.09.10	S1 switch added (INS stabilization on/off, alignment active indicator)
4.10	04.10.10	Password for software parameter protection added
4.11	05.10.10	Figure for Enslaving data processing added
4.12	12.12.10	End-stops added, maintenance of feet added, screenshots updated
4.13	03.03.11	JOYSTICK LOCK additionally used for zero adjust of joystick Delay compensation of video tracker
4.14	25.03.11	Postproc procedure added (InertialExplorer, ReadXIOFile)
4.15-I	06.05.11	Adaptation (branch) for customer Tender
4.16-I	07.05.11	Proposal for customer Tracker Range
4.17	26.06.11	Update Software with advanced Waypoint/Window control
4.18	19.07.11	Clarification according to meeting July 6 th 2011

iMAR is certified EN9100 and ISO9001



Information in this document is subject to change without notice. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of iMAR GmbH. The system iPSC-TR and iPSC-GP40 and all provided information are iMAR Intellectual Property and protected by extended copyright.

Microsoft, MS, WINDOWS® are registered trademarks of Microsoft Corporation.

LabView™ is a trademark of National Instruments Corporation.

iMAR™ is a trademark of iMAR GmbH, Germany.

Other company names, products, trademarks, and registered trademarks used throughout this manual for descriptive purposes are the property of their respective companies.

Quick Guidance through this Manual:

Maintenance Hints are marked by a blue indicator.

Safety Hints (Danger!) are marked by a red indicator.

Operational Hints are marked by a green indicator.



1 Introduction

1.1 General Overview

This document provides an overview on the system configuration and performance characteristics of iPSC-TR, a cluster of up to five Two Axes Stabilized Pedestals of Series iPSC-GP40 with two degree of angular freedom together with the supporting devices

- TV-Tracker iOET²
- Stabilization & Control Unit iSCU with real-time operating system
- DGPS for < 1 m positioning
- Wireless data transmission between each tracker and the Central Computation Unit CCU (also called TRCC in this document).
- Shelter for CCU and for each local tracking station including air condition and operator panel.
- Trailer for each pedestal for easy transportation

Following additionally features are available as an option (not part of the main quotation; for details see section "options" in the quotation):

- RTK GPS with < 5 cm performance for fast locationing of mobile operated trackers
- Inertial Measurement System iNAV-RQH (as an option for off-shore applications, i.e. installation of the tracker on a boat).

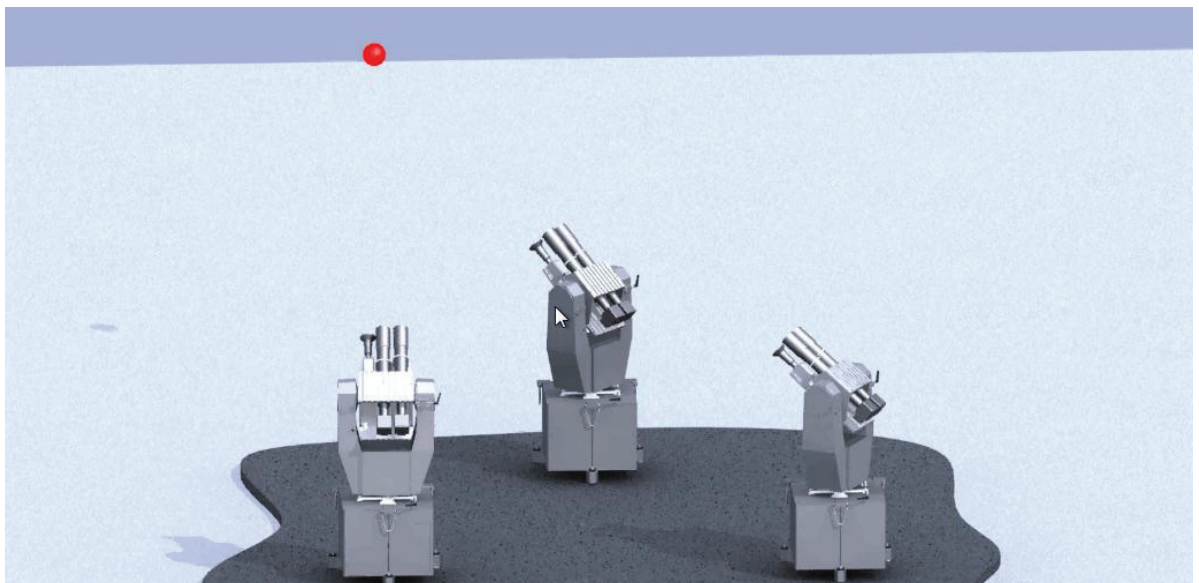


Figure 1: Tracker Range iPSC-TR with included target trackers iPSC-GP40



The system iPSC-TR includes all required signal processing for real-time and post-processing for the target tracking application. Each tracker can be used as stand-alone instrument or as a device being integrated in a complex range architecture.

Each tracker of type iPSC-GP40 can be installed on-shore (i.e. on the beach or elsewhere on land) or – if the system is equipped with an inertial navigation system iNAV-RQH as proposed in the option – it can be operated off-shore (i.e. naval vessel installation) to increase the triangulation accuracy especially if all other trackers are installed on one straight line on the beach.

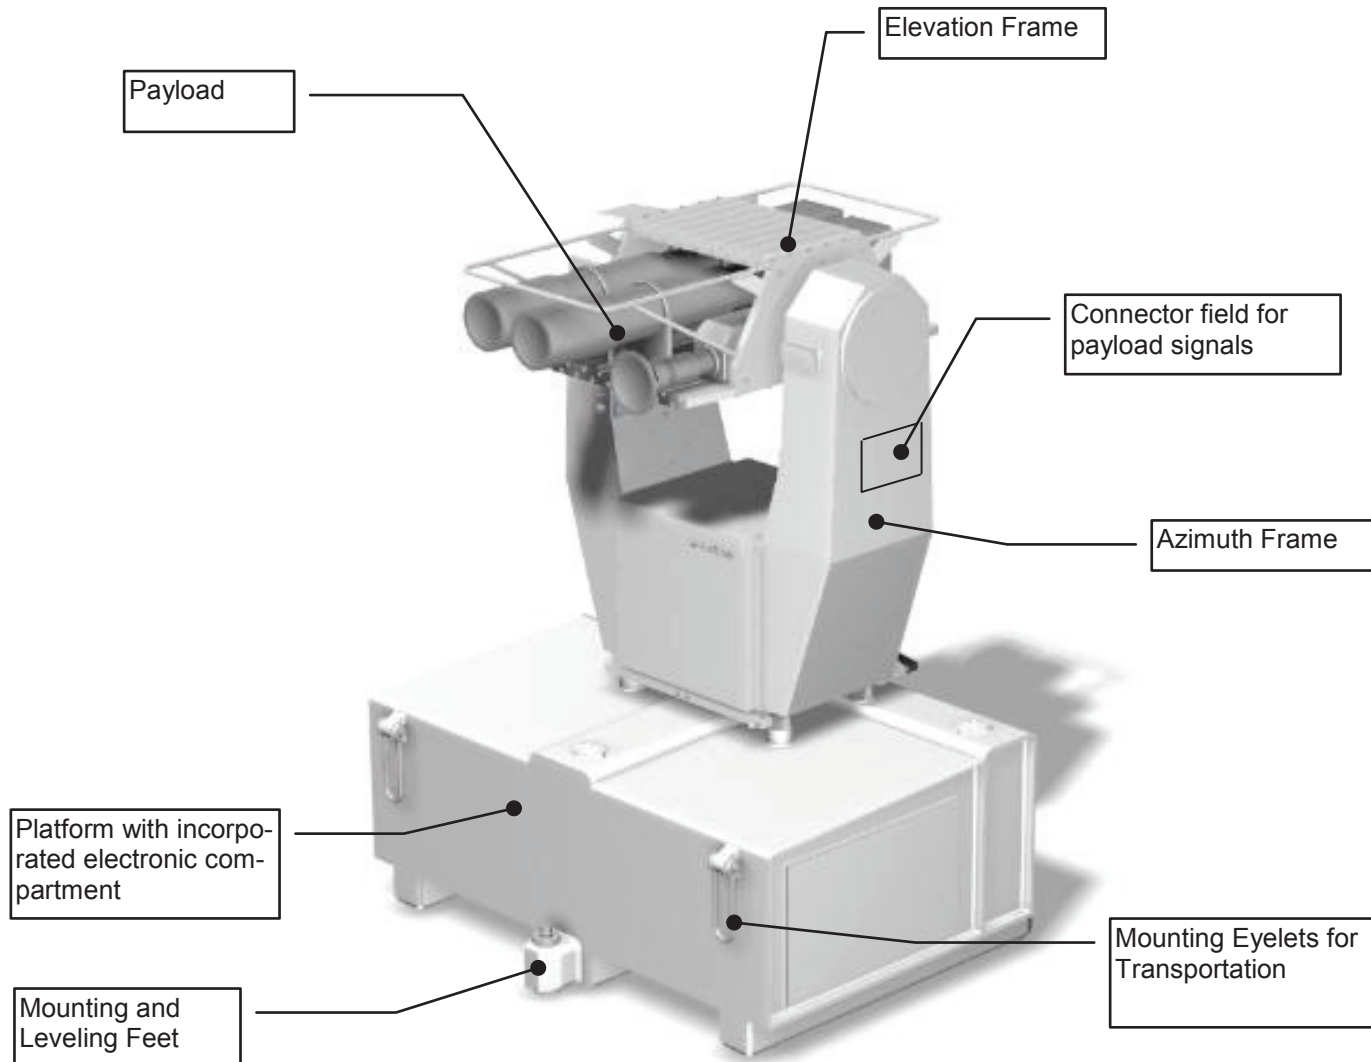


Figure 2: 3D View of the Instrument iPSC-GP40 (version with rectangular foot)

1.2 Features Overview

- Elevation over azimuth gimbaled two axes platform with built-in control and power electronics.
- Position readout resolution better than 0.000'1 deg.
- Smooth stable rates over large dynamic range suitable for long focal length sensors
- Continuous rotation in azimuth and limited angular freedom (total travel more than 200 deg) in elevation
- Direct drive brushless torquers and direct shaft mounted optical position encoders
- High angular acceleration and rate capability to track also fast aircraft and missiles (up to more than 3 Mach at reasonable distance and target size)
- Sealed for sea coast and naval vessel environment
- Sensor Platform with central mounting of customised optical sensors. The sensor mounting platform has T-slots accepting a wide payload range. Mounting is prepared for the payload defined by customer.
- Three mounting eyelets for transportation
- Integrated iSCU Stabilization and Control Unit for remote control of the platform motion via external PC or joystick or external command interface. Available interfaces:
 - TCP/IP / UDP (Ethernet)
 - CAN Bus
- Integrated DGPS (1 m performance) or as an option RTK GPS (2 cm performance) for tracker localization

- As an option stabilization of the tracking system using an inertial measurement system iNAV-RQH (only for off-shore application, i.e. installation on a boat)
- Interfaces to be usable in automatic or half-automatic Multi-Tracker applications with up to five trackers
- Stand alone mode available with manual joy-stick control or in iOET² Opto Electronic Target Tracking mode using the analog video signal output of an onboard TV sensor (sensor to be provided by the user).
- Open user interface to allow direct drive control by the user.

Built in diagnostics, data logging capability and servo debug tools ascertains system health prior to its utilization. The controller has also build-in monitoring features during operation

- Over temperature
- Encoder watchdog
- Processor watchdog
- End switch limiters on the elevation axis

1.3 Topology Overview

The following figure shows the system architecture, as an example drawn with 3 trackers and one TRCC / CCU. Each tracker communicates by wireless data transmission with the TRCC, where the trajectory is calculated in real-time and distributed back to each tracker.

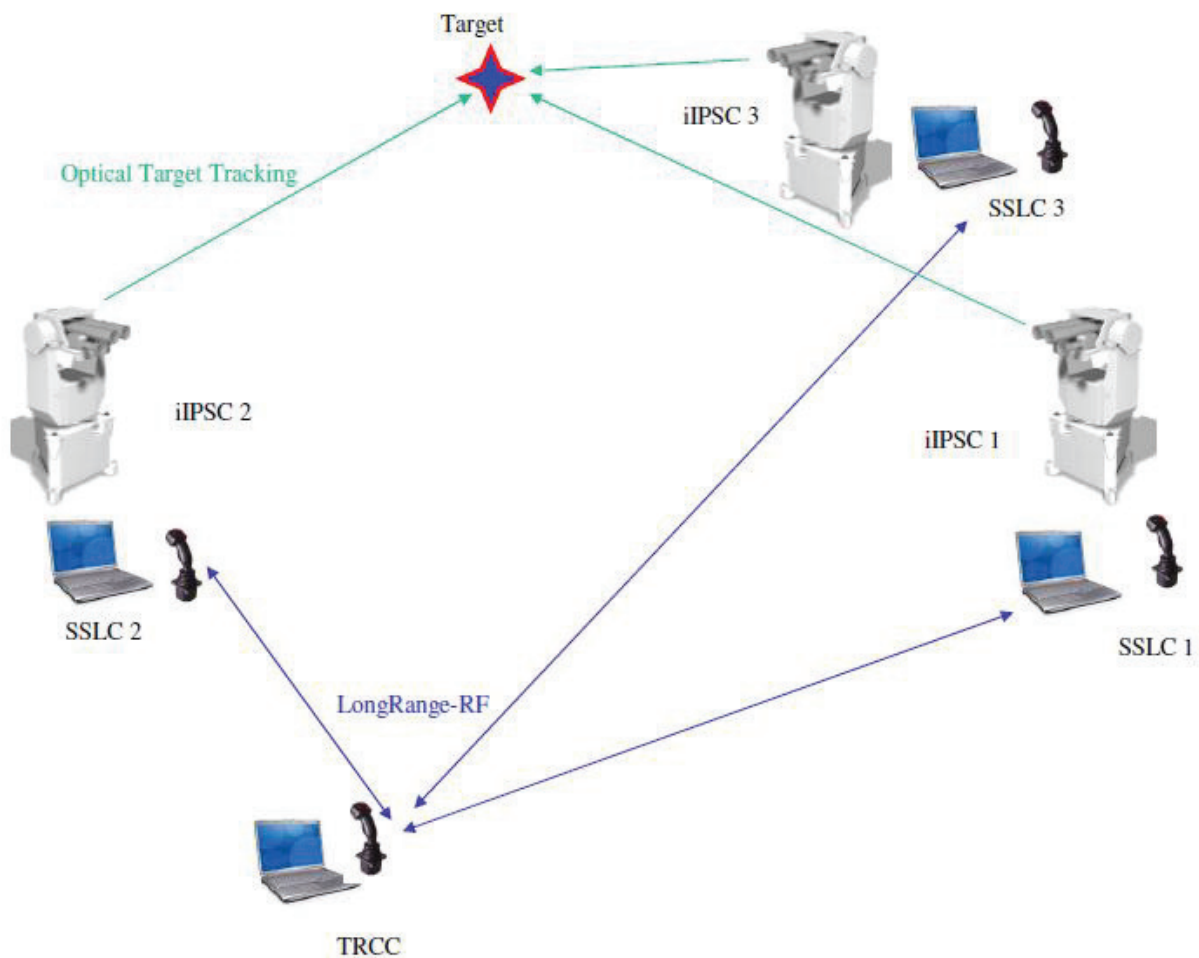


Figure 3: System architecture of N trackers, connected to one Central Station (TRCC / CCU)

The next figure shows the constellation in more detail (including INS option).

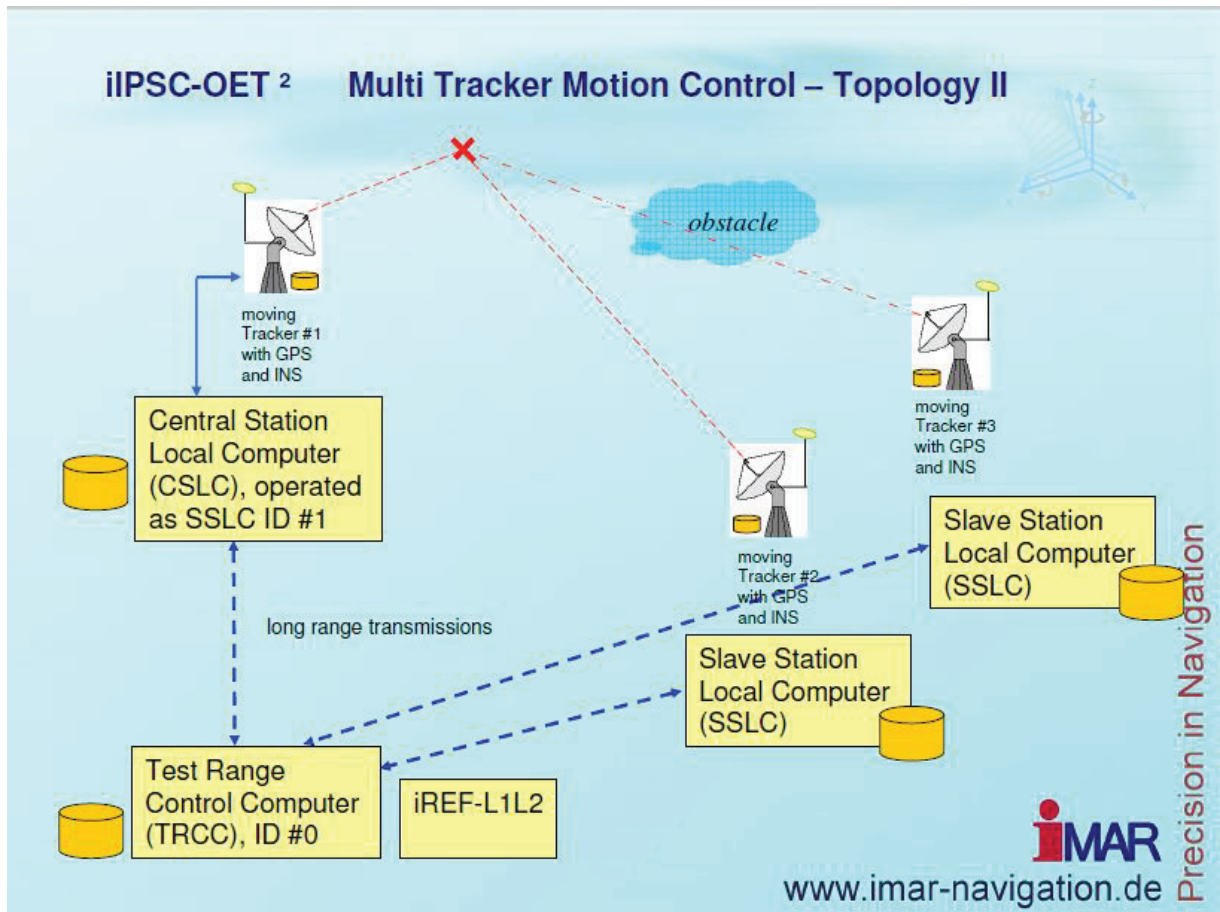


Figure 4: System architecture of N trackers (SSLC / CU), connected to one Central Station (TRCC / CCU)

1.4 Data Storage Overview

Each system generates and stores its data in real-time and provides them for analysis and post-processing:

in standard configuration:

- elevation,
- azimuth,
- time and time stamps,
- boresight errors,
- video data (time-stamped)
- triangulation results,
- GPS position,
- standard deviations,
- BIT information

and if the INS is applied as an option, additionally:

- roll,
- pitch,
- heading,
- dynamic position of the tracker [if installed on a boat])

2 Two-Axis Stabilized Multiple Sensor Platform iIPSC-GP40

2.1 Platform Design

The 2-Axis Sensor Platform employs direct drive modules for the outer azimuth axis and for the inner elevation axis. The modules support the yoke structure of the inner elevation axis with the square inner gimbal providing the mounting platforms for the different sensors. The axes are driven by brushless direct drive torquers. The high resolution optical encoder is mounted directly on the shaft eliminating any possible coupling errors.

The outer azimuth axis has unlimited angular freedom and is equipped with sliprings serving the electrical access to the payload and electrical lines of the instrument (house keeping data). The angular freedom of the elevation axis is limited. Resilient end stops restrict the angular freedom within the designed limits. Electrical limit switches monitor and protect the end stops.

The elevation axis is orthogonal to the outer axis featuring the square gimbal with the mounting platforms for the different sensors.

Manually adjustable leveling spindles permit the precise vertical alignment of the azimuth axis. Concentric anchoring bolts secure the instrument to the foundation and lock the leveling adjustment. There is no undue stress introduced assuring good long-term stability.



The Cross Spirit Level simultaneously visualizes the inclination of two axes in the base of the device. This enables a quick coarse leveling of a tracking mount. The resolution of the spirit level matches the range of the precise inclinometer mounted in the yoke structure of the azimuth axis.

For stationary applications, the instrument is mounted on a ruggedized compartment which is hosting the electronics and the INS. Manually adjustable leveling spindles permit the precise vertical alignment of the azimuth axis.

2.2 Servo Loop for Drive Control

Both torque drive axes have the same basic drive system. Figure 5 outlines the different modules of the all-digital speed/torque controller. Designed for direct drive application, the controller uses the position information of a high-resolution optical encoder to generate the si-

sinusoidal commutation current. The optical encoder provides a pseudo-absolute output for initialization and continues operation as a relative encoder device with SIN/COS advanced resolution generation.

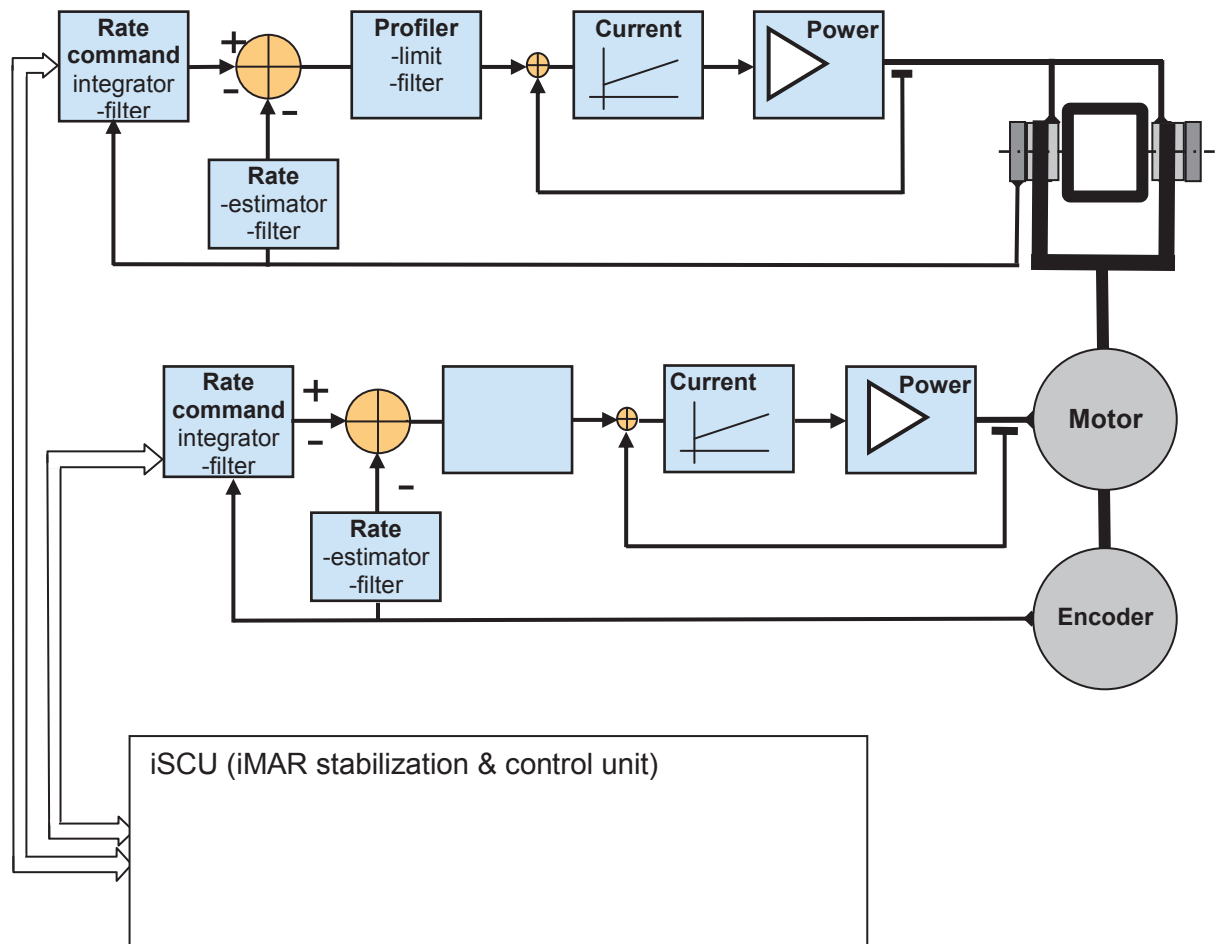


Figure 5: Torque Drive Control Design (iMAR controller)

There are two regulation loops, a **position loop** and a **current loop**. The current loop generates the signals for the power bridge with respect to the position of the magnetic motor poles. The brushless motors are getting sinusoidal commutated. The command is rate / torque related.

2.3 Sensor Mounting Surfaces

The central square elevation gimbal has four mounting surfaces for the payload. T-slots allow the mounting of the sensor at the suitable longitude position for best balancing about the elevation axis. The large sensor mounting platforms provide also space for the mounting of counter balancing weights.

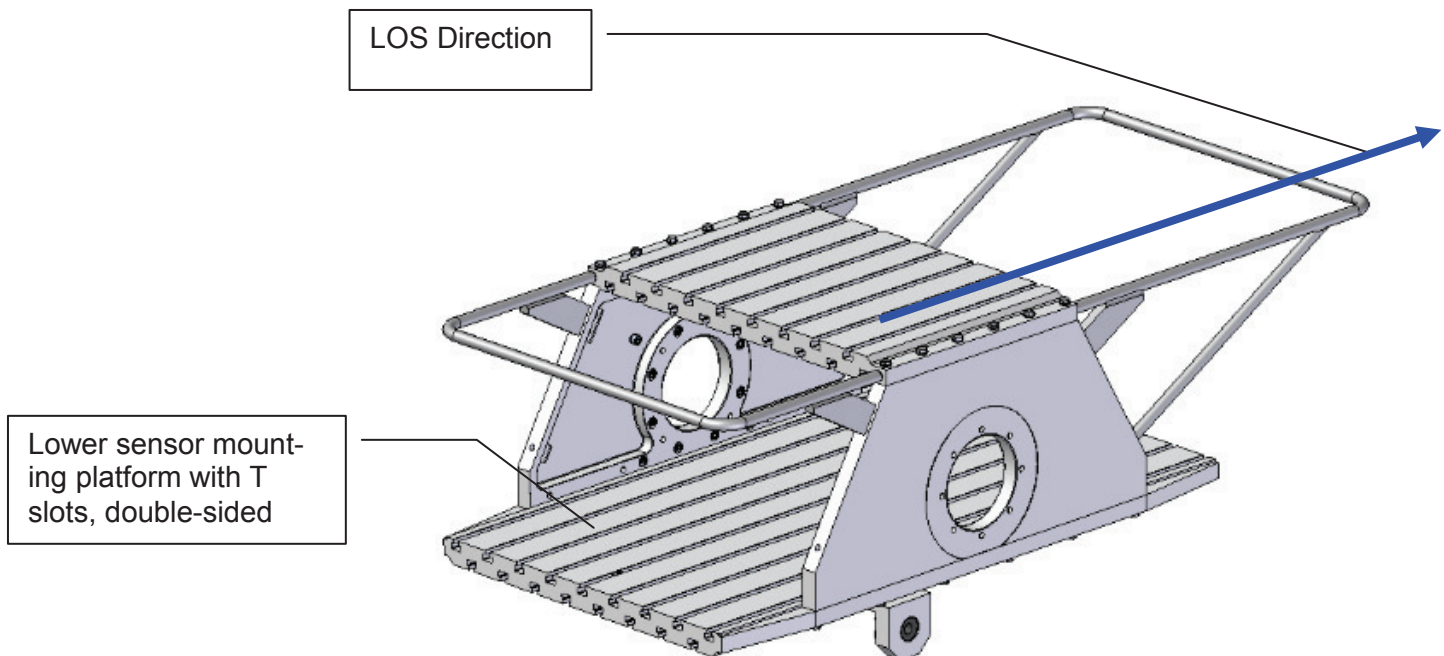


Figure 6: Sensor Mounting Surface

2.4 Payload

The sensor systems (e.g. cameras) are mounted on the sensor mounting surface. The payload is balanced for best dynamic and static tracker operation and lowest power consumption.

The Sensor Mounting Surface is specially designed for the customer's payload requirements.

Warning:

The payload may be supplied by 235 V AC. Switch off any power supply and disconnect any cable to the system prior opening the cable tray covers or performing any work on the payload.

