

iRailLoc-C

Sub-Decimeter Localization & Timing & Communication System
for all kinds of local & high speed Passenger Trains, Freight Trains and Trams

iRailLoc-C is a member of the advanced iNAT series (iMAR Navigation and Timing) and is specially expanded to the needs of modern train operation and localization. It provides the required PNTC features (positioning, navigation, timing & communication), all in one box, designed according to the relevant railway standards regarding EMI/EMC, power supply and environmental impacts.

iRailLoc-C provides the relevant motion and location data for train location, train guidance and train control tasks and provides also open interfaces to auxiliary sensors on demand. All kinematic measurements like acceleration, angular rate, attitude, true heading, velocity and position of the rail vehicle are provided in real-time incl. timestamp and standard deviation with a data update rate of up to 500 Hz.

- robust, compact, lightweight system, excellent SWaP; fully IP67 protected enclosure
- Low power consumption: typ. < 35 W
- based on robust MEMS Gyro, Accel technology with integrated multi-frequency / multi-constellation (MF/MC) GNSS and RTK/PPP support
- support of simultaneous GPS, GALILEO, GLONASS, BeiDou
- up to 3 odometer / wheel sensors supported
- automatic odometer scale factor estimation
- 2 integrated, redundant radio modems for communication via GSM-R / GSM / LTE or 5G
- interfaces: 4 x UART / 2 x Ethernet, 3 x odometer
- contains 2 powerful CPUs to allow dissimilar algorithm designs, integration of dissimilar sensor information etc.
- up to 128 GByte internal memory ("black-box")
- maintenance-free operation
- easy to use, easy to configure; powerful GUI

iRailLoc-C comes in a small, sturdy, light-weight enclosure. Interfaces for communication (Ethernet, CAN, UART, GSM-R or LTE or 5G) and for odometer and GNSS antenna are included.


Depending on the application, environmental conditions and required real-time accuracy, the data fusion includes INS, GNSS, VMS or any other external sensors, providing position and/or velocity, standard deviation and time stamp.

In urban canyons the number of observable satellites is quite limited and therefore the iRailLoc-C supports an all GNSS constellation data fusion. The 42+ state Extended Kalman Filter processing guarantees a significant better and more robust position and velocity result compared to standard solutions.

Due to the high reliability of the system architecture the devices are used also in most challenging railway, surface vehicle, shipborne, airborne and defense applications.



The **iRailLoc-C** is based on the real-time operating system QNX, which is the choice to serve safety relevant applications.

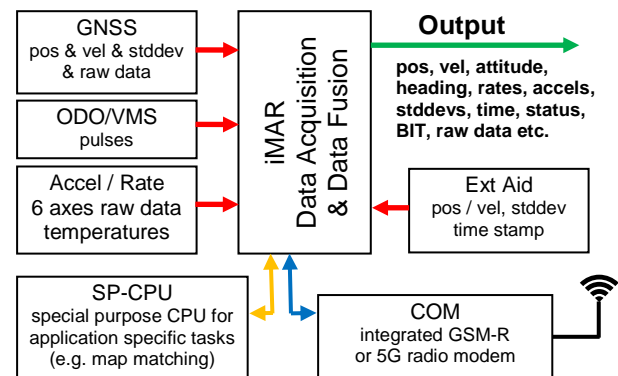

iRailLoc-C is, as all iNAT systems, delivered with the MS-Windows (or LINUX or MacOS alternatively) based configuration software **iXCOM-CMD**. This software allows to configure the output interfaces. Furthermore, all output data can be displayed and stored online on the user's notebook, tablet or process computer. It also allows powerful playback capabilities and provides data export in many formats (csv, xml, GoogleEarth™ etc.). Python and MatLab interface available.

System functions and interfaces can be adapted to specific customer needs – contact our technical sales engineers for details!



Technical Data iRailLoc-C (typical, rms):

	Rate	Acceleration	Attit./Heading	Position	Velocity	Height
Range:	± 500 °/s	± 8 g	unlimited	unlimited	unlimited	unlimited
Bias Stability (AV) ¹ :	< 2.5 %/h	< 0.1 mg				
Bias (filtered ¹):	< 5 %/h	< 1 mg				
Bias day-to-day ² :	< 0.2 %/s	< 2 mg				
Angles (Attitude, Hdg.):	0.1° / 0.2° 0.05° / 0.1° RP/Y (INS / GNSS, w/o with RTK) 0.15° / 0.25° 0.1° / 0.15° RP/Y (after 10 s GNSS outage, w/o with RTK)					
Position (horizontal plane) ³ :	+/- 0.03 m CEP (INS/GNSS RTK real-time) +/- 0.4 m CEP (INS/GNSS with SBAS) +/- 1.8 m CEP (INS/GNSS) 0.1 % of DT CEP (with odometer, during GNSS RTK outage) ⁴					
Velocity:	0.02 m/s (INS / RTK GNSS)					
Noise:	0.15 %/sqrt(hr)	23 µg/√Hz	0.02 °	< 0.01 m	< 0.01 m/s	
Resolution:	< 0.0001 °/s	< 20 µg	0.001 °	< 0.001 m	< 0.001 m/s	
Linearity error:	< 0.2 %	< 0.5 %	< 0.2 %			
Scale factor error:	< 0.3 %	< 0.1 %				
Scale factor (filtered)	< 0.1 %	< 0.07 %	< 0.1 %			
INS / GNSS / ODO proc.:	integrated advanced 42+ state INS/GNSS/+ extended Kalman filter data fusion					
Internal GNSS Engine:	multi-frequency / multi-constellation GPS / GLONASS / GALILEO / BeiDou, SBAS, QZSS, RTK					
Processing Power:	2 separate powerful ARM CPUs, one for sensor data fusion and one for other tasks (e.g. map matching; incl. 128 GB SD)					
Data Processing Rate:	up to 500 Hz; PPS timing accuracy better 10 ns					
Data Output Rate:	1...500 Hz; all data available in real time, latency < 3 ms, jitter < 1 ms					
Synchronization:	2 x PPS_OUT (RS422 level, latency < 1 µs)					
Radio Communication:	integrated GSM-R modem, integrated LTE modem with 3G/2G fallback; 2 integrated SIM slots; optional one of both replaceable by integrated 5G modem; recommended antenna (GNSS multi-frequency, GSM-R, LTE): Huber & Suhner 1399.99.0152 (Sencity Rail rooftop MIMO Antenna)					
Interfaces:	- 2 x isolated UART RS422 with common 24 V DC (max. 6 W) output, - 2 x isolated UART RS422 with additional PPS trigger output, - 2 x Ethernet 100 MBit/s (TCP/IP, UDP), NTP Time Server, - up to 3 odometers supported (A or A/B opto-coupler; 3.5 ...30 V, 5 mA) with isolated supply output (15 V DC, 6 W max.), types of Knorr Bremse, Baumer, Sick etc. supported					
GNSS Correction Data:	DGPS/RTK correction data from base station, if available (via GSM-R, LTE, UART or Ethernet input)					
Data Latency:	< 1 ms (sampling accuracy better 1 µs, time-stamped according to PPS; jitter < 1 ms) in RTK mode					
Connectors:	M12 (D coded, 4 pin) for Ethernet; M12 (x-coded, 8 pin) for UARTs N sockets for LTE / GSM-R / GNSS antennas Harting HAN-16A, male as Main Connector (power, odometers)					
Integrated Data Storage:	32 GByte (option: 128 GByte); lasts for several days continuous data sampling as "black-box"					
Graphical User Interface:	MS Windows or LINUX or MacOS based GUI / HMI software iXCOM-CMD for configuration, visualization, data recording, data converting and playback operation					
Power Supply:	nom. 24...110 V DC (extended voltage range 14.4...154 V DC according to EN 50155); < 35 W typ.; reverse and overvoltage protection up to 160 V					
Temperature; MTBF:	-40...+71 °C (outer case temperature) operating, -40...85 °C storage; 50'000 hrs (surveying applications)					
Shock, Vibration:	90 g, 11 ms, 10...2'000 Hz 5 g rms (endurance); 10...2'000 Hz 2 g rms (operational)					
Applied Standards:	EN 45545, EN 50121, EN 50155-2017 (certification in progress)					
Mass, size; IP:	3'500 grams, ≈ 202 x 232 x 111 mm ³ (without connectors); IP67					
Operational Support:	railway environment / train applications					
Part Number:	00230-00005-xxxx					
Deliverables:	- iRailLoc-C MEMS based INS with integrated GNSS, radio modem, odometer interface, lab or customized cable set - iXCOM-CMD MS Windows or LINUX or MacOS based GUI software					
Options:	- SW drivers / toolkits under C++ and Python (with SDK under Qt / C) - railway certified GNSS antenna (also including support of 2G / 3G / 4G / 5G mobile communication) - CAN interface customized interfaces specific algorithms (also customized solutions)					



iMAR Navigation GmbH • Im Reihersbruch 3 • D-66386 St. Ingbert / Germany
 Phone: +49-(0)-6894-9657-0 • Fax: +49-(0)-6894-9657-22
www.imar-navigation.de • sales@imar-navigation.de

¹ after algorithm converging under sufficient motion excitation with sufficient GPS aiding conditions

² values without sufficient INS/GNSS data fusion conditions; the bias are estimated / compensated during GNSS aiding under motion automatically (Kalman filter)

³ GNSS based altitude deviation is about 1.5 times of GNSS based horizontal error

⁴ position error in relation to distance travelled (DT) during GNSS outages (requires a vehicle motion sensor / wheel sensor) – after suffic. GNSS

